





**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5-10 seconds)



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

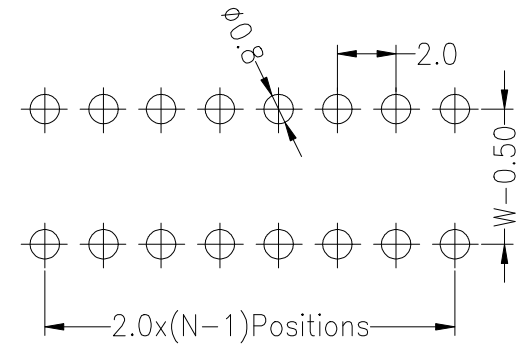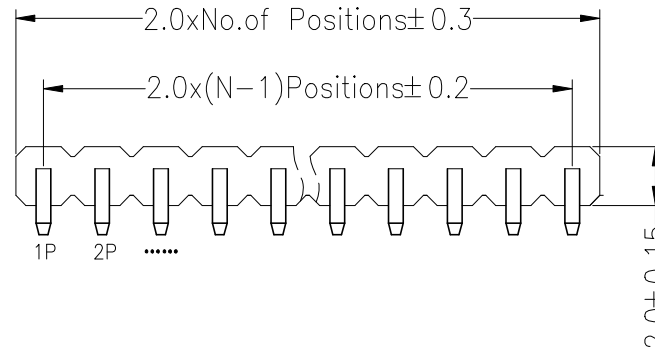

*Ordering Information*

**1310 11 XX X N XX U XXX X 01**

No.of Pins Per Row 2--40	Insulator Material Option C=BK-PA6T E=BK-PA9T F=BK-LCP	Contact Plating G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold S0:Gold Flash/Tin SN:Tin	Pin Length Packing 0=PE Bag A=Tray T=Tube R=Reel
-----------------------------	---	---	---

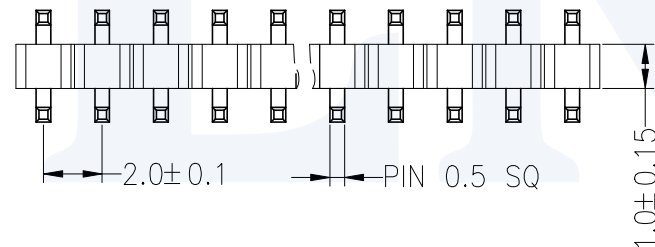

注:塑胶居中

Dimension antitheses list			
ITEM	PC	W	L
Standard	2.4		
Alternate			

				OPERATION		DRAW	yiyusheng	20.03.20	SCALE	FIT	<b>JILN</b> 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 131011XXXNXXUXXX01		
				X.XXX	±0.10		SHEET	1/1				
A0	2020.03.20	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	TITLE: 2.0PH 1xNpin H1.0mm Single 90°		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				