
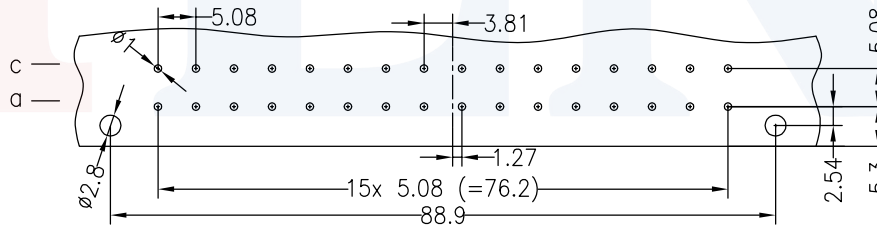

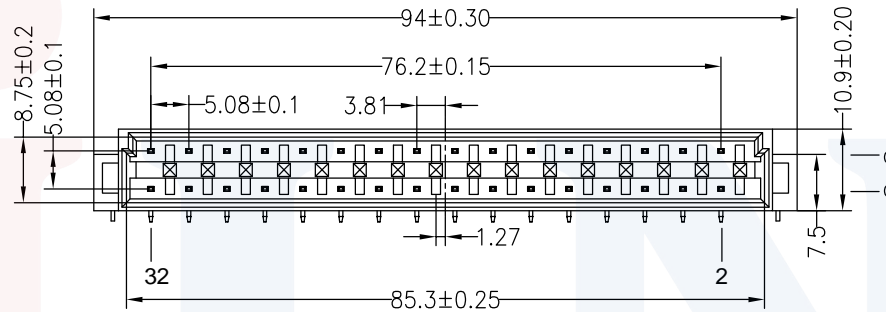



HSF RoHS

SPECIFICATIONS

Rated Current: 6.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +125°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

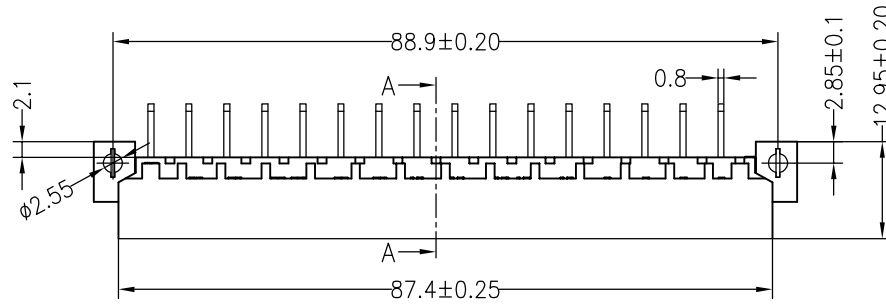

PCB LAYOUT (RECOMMENDED)

Ordering Information

3513 2 32 A M R XX BWA1

No. of Pins
32PIN

Contact Type
M=Male

Contact Plating
 G0: Gold Flash
 S0: Gold Flash/Tin
 S1: 3U" Gold/Tin
 S2: 5U" Gold/Tin
 S3: 10U" Gold/Tin
 S4: 15U" Gold/Tin
 S5: 30U" Gold/Tin
 SN: Tin

OPERATION		DRAW	YiYuSheng	17.05.15	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL					

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2017.05.15	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 3513232AMRXXBWA1
 TITLE: 欧式插座 5.08 高电流 弯公带鱼叉
 DIN41612 5.08mm high current
 right angle male with harpoon