
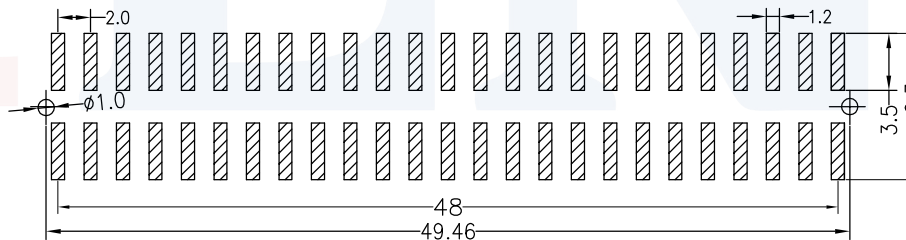
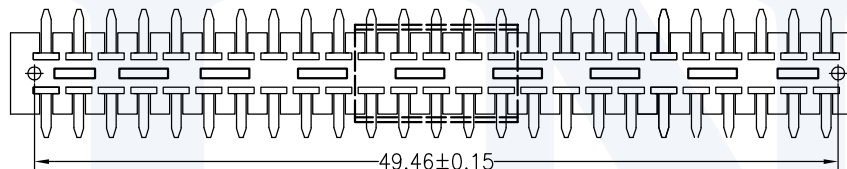

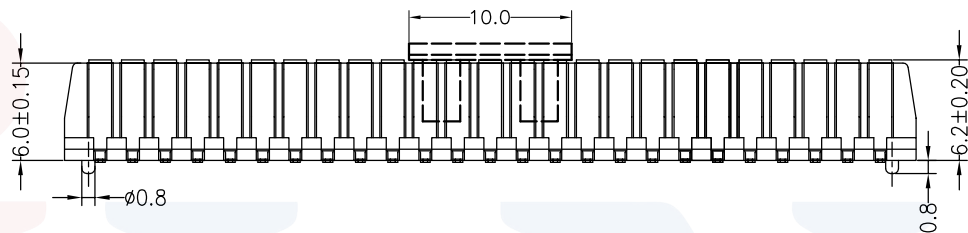


HSF RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA9T
 Max.Processing Temp: 230°C for 30-60 seconds
 260°C for 10 seconds

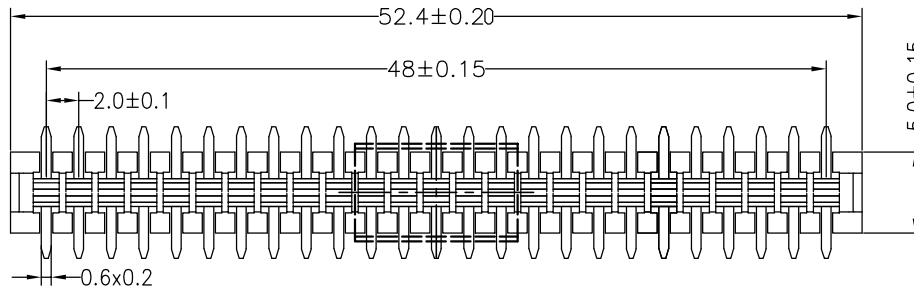

Recommended P.C.B Layout

Ordering Information

4400- 2 25 M G1 M E B W 02-R

No.of Pins
2x25P

Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:2U" Gold
 G3:3U" Gold
 G4:5U" Gold
 G5:10U" Gold

OPERATION		DRAW	JinChengXin	19.05.05	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2019.05.05	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 4400-225MG1MEBW02-R
 TITLE: 2.0金手指连接器/2X25P/公座/H6.0/SMT/贴脚宽 8.3/PA9T料/足Au1u" /带柱Φ0.8H0.8/卷装加盖