


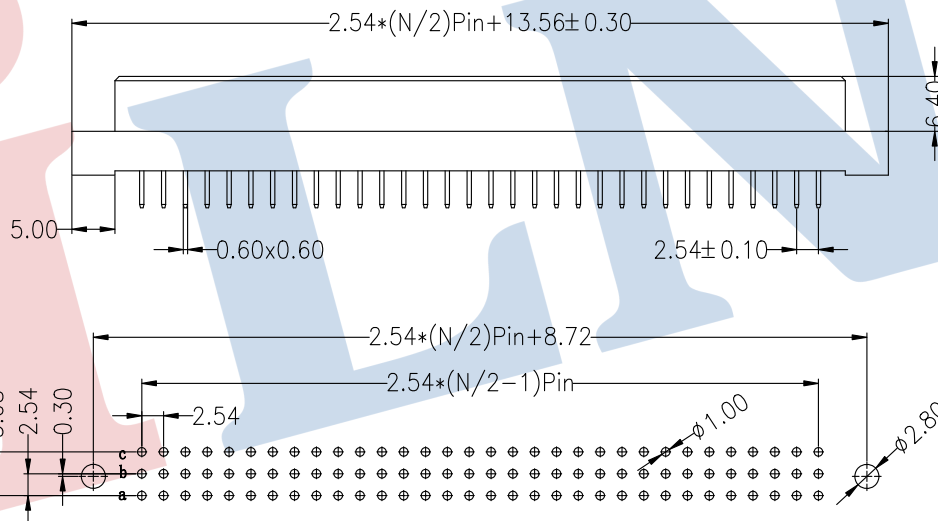


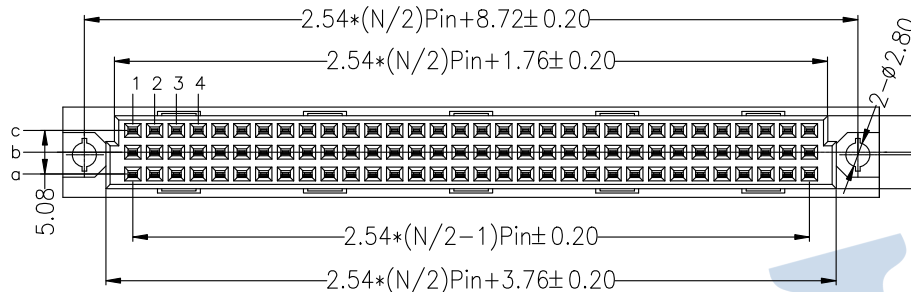

SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Resistance To Soldering Heat:  
 245°C ± 5°C, 10s (PBT insulator)

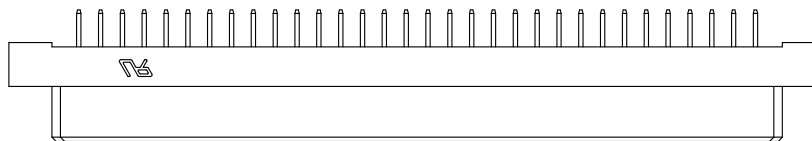

Ordering Information

35113 XX A F S XX B N A X

No. of Pins  
 NPin  
 N=21, 30,  
 48, 96

Contact Type  
 F=Female

Contact Plating  
 G0: Gold Flash  
 S0: Gold Flash/Tin  
 S1: 3U" Gold/Tin  
 S2: 5U" Gold/Tin  
 S3: 10U" Gold/Tin  
 S4: 15U" Gold/Tin  
 S5: 30U" Gold/Tin

Stream Code

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	16.07.05	SCALE	FIT
				DIM	TOL					
B	2016.07.05	更正塑胶 A B C 方向		X.X	±0.30	CHECK			UNIT	mm
A0	2015.03.28	NEW DRAWING		X.XX	±0.20					
				X.XXX	±0.10					
				Angle	± 3°	APPROVE			SHEET	1/1

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	35113XXAFSXXBNAX
TITLE:	欧式插座 母座 180度 3xNP 成品系列图