

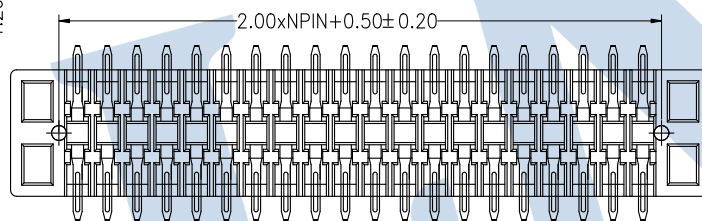
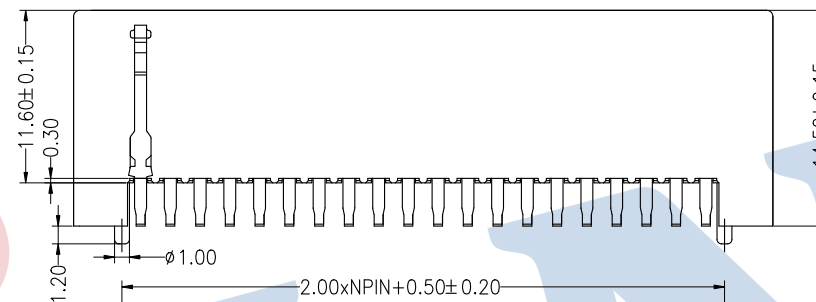


HSF RoHS

SPECIFICATIONS

Rated Current:2.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(PA9T insulator)

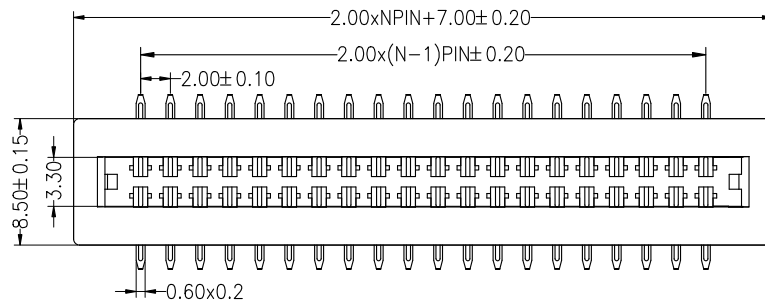

Ordering Information
4400- 2 XX M XX F E B W 0 X

No.of Pins
 2x15P
 2x20P
 2x23P
 2x25P
 2x27P

Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:2U" Gold
 G3:3U" Gold
 G4:5U" Gold
 G5:10U" Gold

Recommended P.C.B Layout

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	OuYangHui	17.11.03	SCALE	FIT
A0		2017.11.03	NEW DRAWING		X.X	±0.30					
					X.XX	±0.20					
					X.XXX	±0.10					
					Angle	±3°					
					DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	4400-2XXMXXFEBW0X
TITLE:	2.0金手指连接器 2XNP 母座H14.5 SMT 带柱