




HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Retention LEG:Copper Alloy
 Retention LEG Plating:Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245° C±5° C, 10s(PBT insulator)
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout

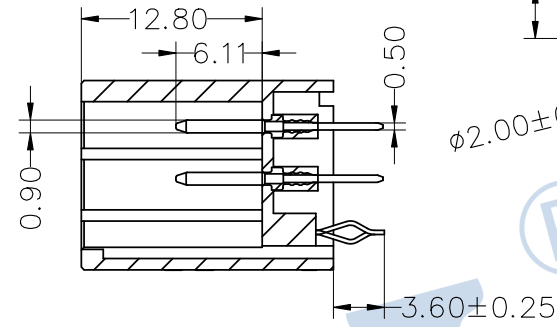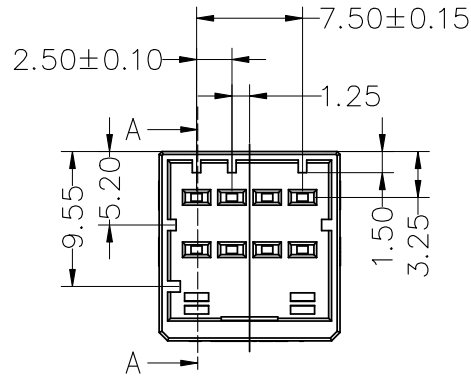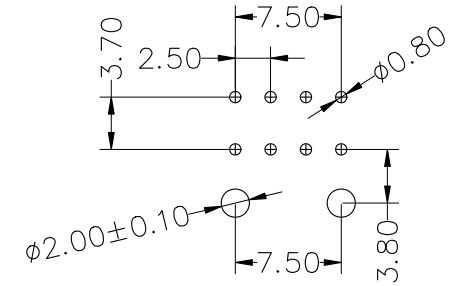

A-A SECTION



Ordering Information

8600-2 04 XX A B 0 X

No. of Pins
2x4P

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 SM:Matte-Tin

Insulator Material
 Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

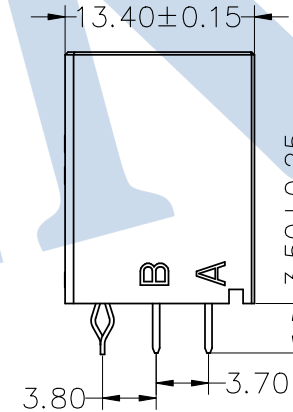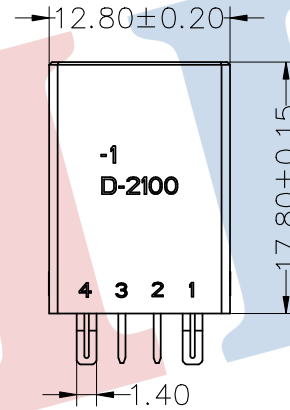

OPERATION

| | |
|-------|-------|
| X.X | ±0.30 |
| X.XX | ±0.20 |
| X.XXX | ±0.10 |
| Angle | ±3° |
| DIM | TOL |

| | | |
|---------|-----------|----------|
| DRAW | YiYuSheng | 19.01.09 |
| CHECK | | |
| APPROVE | | |

| | |
|-------|-----|
| SCALE | FIT |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | ☉ |

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5588

| | |
|----------|---------------------|
| PART NO. | 8600-204XXABOX |
| TITLE: | 2.50mm带围墙双排8Pin针座 |
| 客户规格: | A型双排8芯公针(1318125-1) |

| | | | |
|-----|------------|--------------------------|--------|
| A0 | 2019.01.09 | NEW DRAWING | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |