

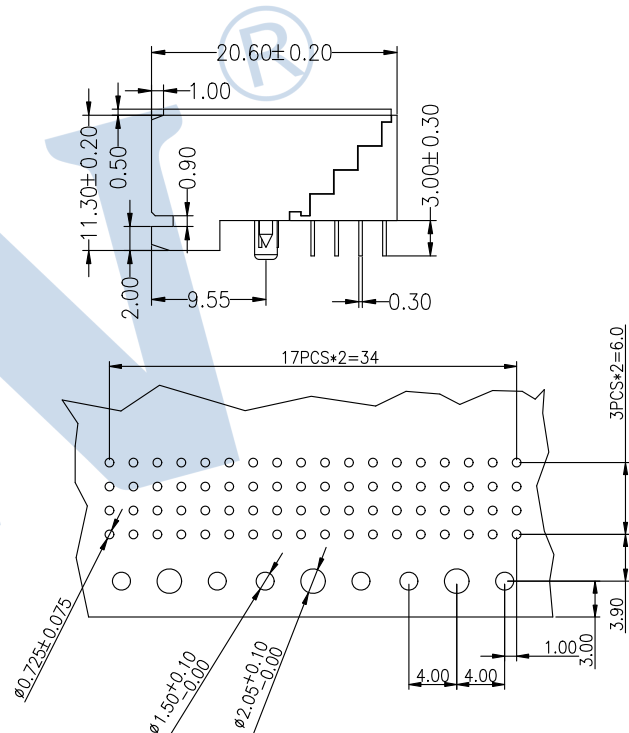


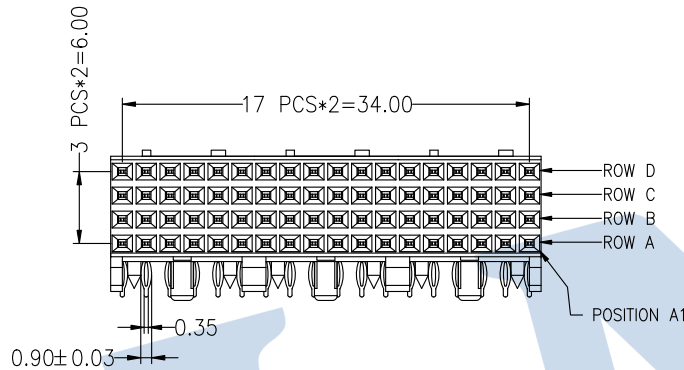

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:500V AC/DC RMS
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C±5°C, 10s(LCP insulator)

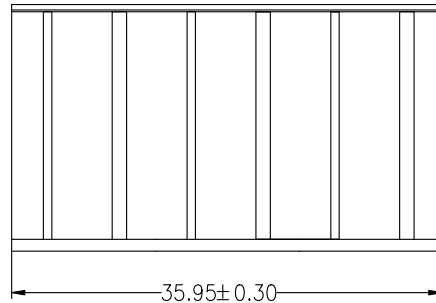

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3510 4 72 A F R XX PW X X

- No. of Pins: 72P
- Contact Type: F:Female, M:Male
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:2U" Gold/Tin, S2:5U" Gold/Tin, S3:10U" Gold/Tin, S4:15U" Gold/Tin, S5:30U" Gold/Tin, SN:Tin
- Packing: A:Tray, T:Tube

				OPERATION		DRAW	YiYuSheng	19.10.29	SCALE	FIT
				X.X	±0.30				UNIT	mm
				X.XX	±0.20				CHECK	
				X.XXX	±0.10				APPROVE	
				Angle	±3°					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	3510472AFRXXPWXX
TITLE:	Futurebus,4*18 Female Press Fit Right Angle Type