
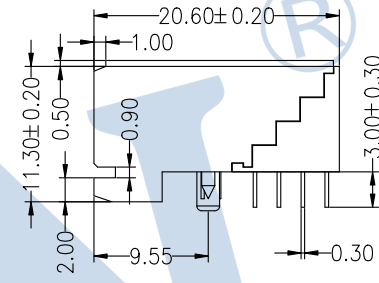
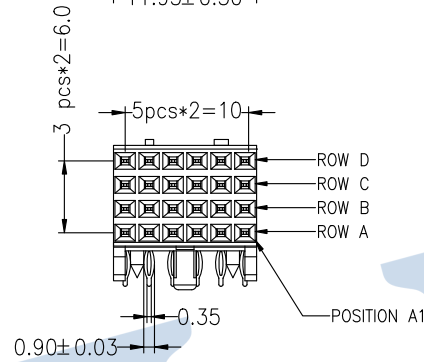


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:500V AC/DC RMS
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C±5°C, 10s(LCP insulator)



Ordering Information



3510 4 24 A F R XX PW X X

No.of Pins
24P


Contact Type
F:Female
M:Male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

Packing
A:Tray
T:Tube

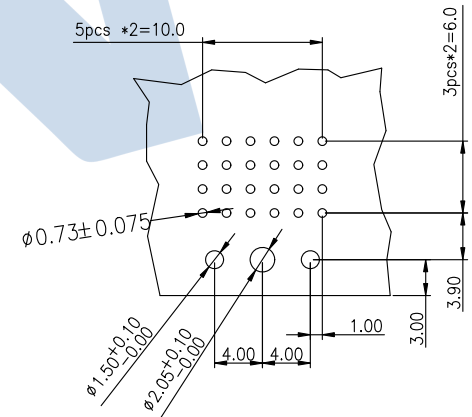

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	YiYuSheng	19.10.29	SCALE	FIT
				X.X	±0.30					
				X.XX	±0.20	CHECK		SIZE	A4	
A0	2019.10.29	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		Angle	±3°	APPROVE		PROJ.		
			CHANGE	DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3510424AFRXXPWXX
 TITLE: Futurebus,4*6 Female Press Fit Right Angle Type