



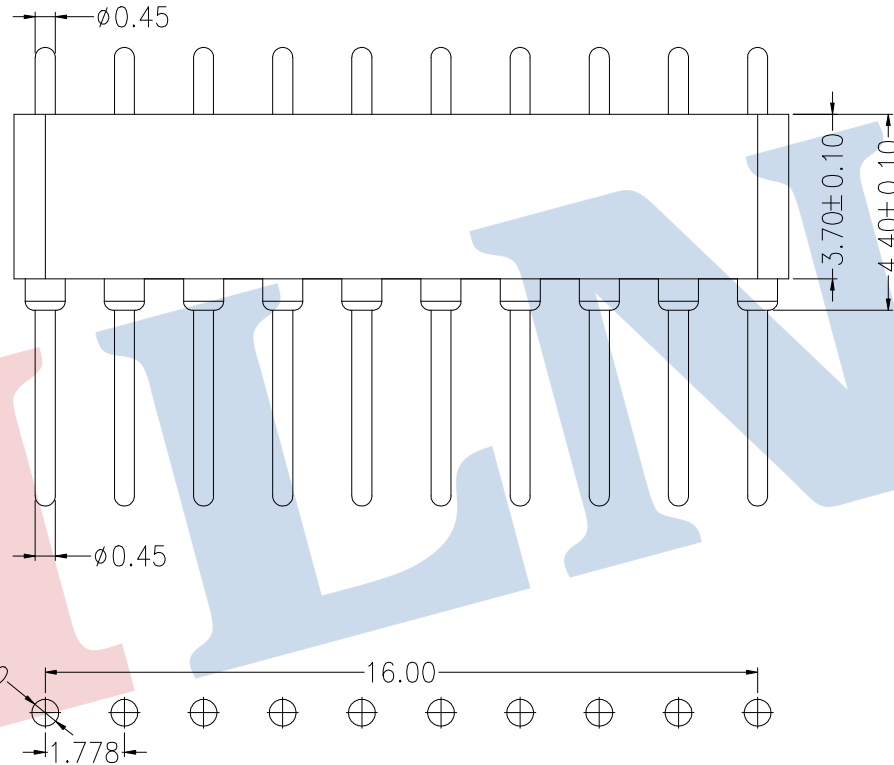

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260°C $\pm$ 5°C, 10s(PA46 insulator)

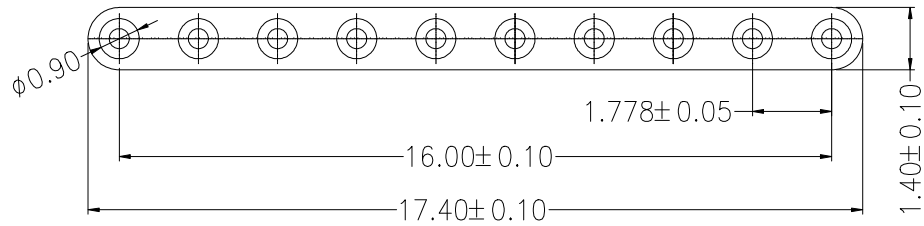

Ordering Information

7310 -44 1 10 S XX 103 X 0X

No.of
Pins
Per Row
1*10P

Contact Plating
G1:Gold Flash
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin
Length
103=10.3mm

Packing
0=Pe Bag
A=Tray
T=Tube

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

				OPERATION		DRAW	JinChengXin	19.08.08	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	$\pm$ 0.30				UNIT	mm		
				X.XX	$\pm$ 0.20	CHECK			SIZE	A4	PART NO.	7310-44110SXX103X0X
				X.XXX	$\pm$ 0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	APPROVE			PROJ.		TITLE:	1.778xH3.7mm Fiber Connector 1x10Pin 180° L=10.3mm
					DIM							