





Materials
 Pin: Brass, machined, (H59-3)
 Plating: Gold plated: 1.25u"m/50u"nickel, full gold
 Insulator body (black): PPS (UL94V-0)

Electrical
 Current rating: 2Amps/contact max.
 Contact resistance: 20mΩ
 Insulation resistance: 1000MΩ
 Operating voltage: 60 AC/DC

Mechanical
 Operating temperature: -40°C to +105°C
 Soldering temperature: 260°C, 10s max

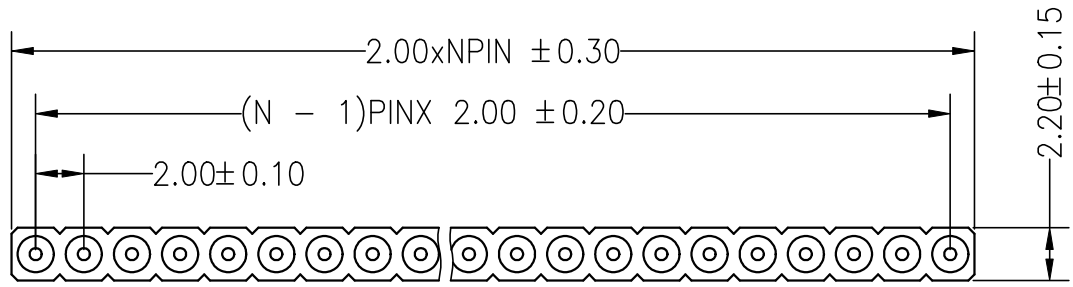

注: 整条总长+0.8

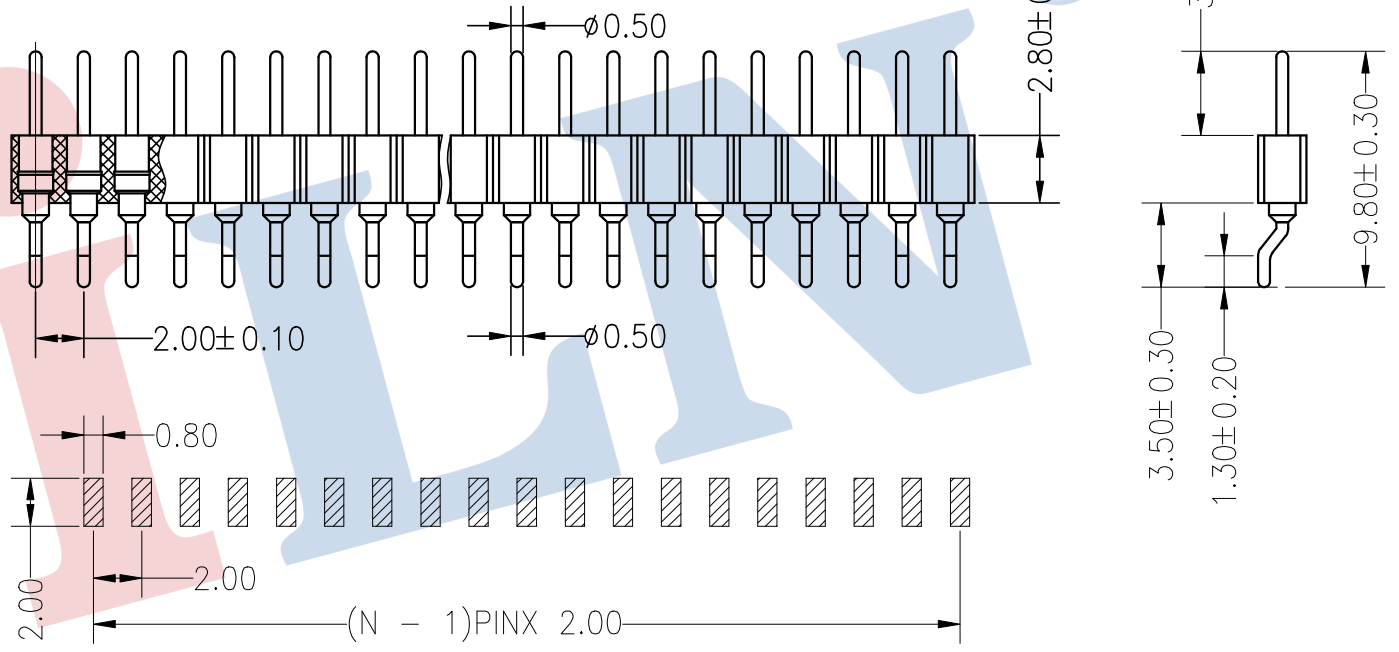

Ordering Information

3612 28 1 XX Z XX 100 X 0 X

No. of Pins: 1-40Pin
 Contact Plating: SN: Tin, G0: Gold Flash, G2: 2u" Gold, G3: 3u" Gold, G4: 5u" Gold, G5: 10u" Gold, S0: Gold Flash/Tin Standard: G0
 Length: 100=10.0mm
 Packing: 0=PE Bag, A=Tray, T=Tube, R=Reel, M=Reel+Mylar

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

				OPERATION		DRAW	YiYuSheng	18.12.13	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	± 0.30				UNIT	mm			
				X.XX	± 0.20	CHECK	SIZE	A4	PART NO.	3612281XXZXX100X0X			
				X.XXX	± 0.10	APPROVE	SHEET	1/1	TITLE:	2.0X2.8 Machine Pin Header 90° SMT L=10.0mm			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					