






SPECIFICATIONS

Current Rating:2.0AMP
 Contact Resistance:20mΩ Max
 Dielectric Strength:Min 1000V RMS
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(PPS insulator)

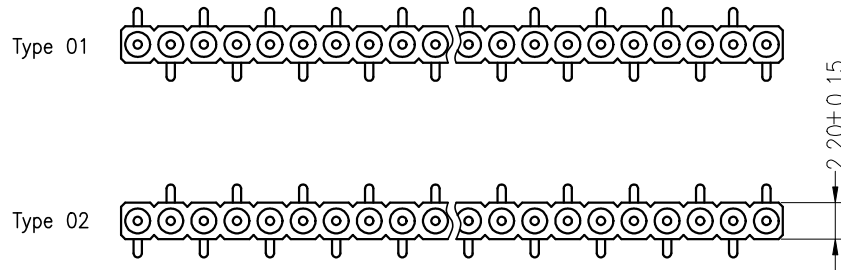

注：整条总长+0.8

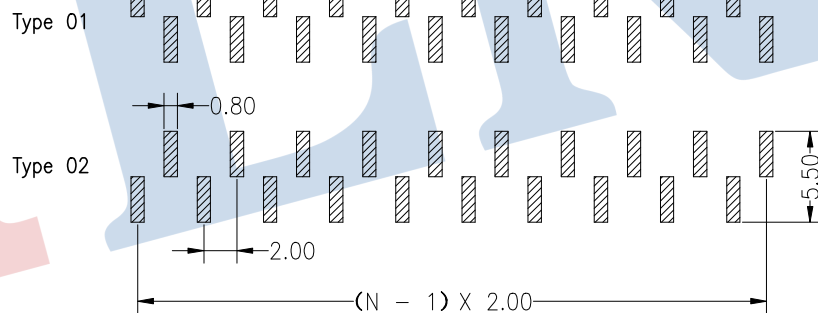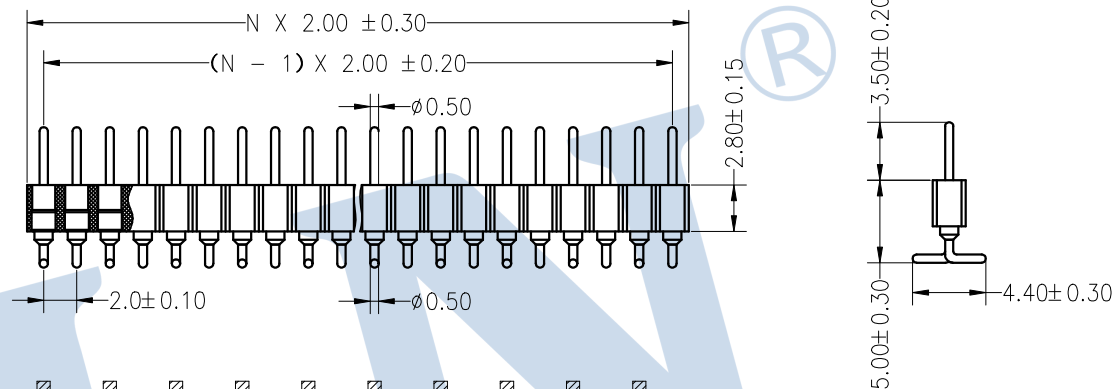

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3612 28 1 XX M XX 100 0X

No.of Rows
 1=Single Row
 2=Dual Row

No.of Pins
 2x40Pin

Contact Plating
 SN: Tin
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin

Length
 100=10.0mm

				OPERATION		DRAW	Jelly Feng	22.07.26	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	3612281XXMXX1000X			
A0	2022.07.26	NEW DRAWING		X.XXX	±0.10	APPROVE	SHEET	1.5/1	TITLE:	2.0X2.8单排双头针SMT L=10.0(针尖0.5-0.5)			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.						